



**BACKSHEET MONOCRYSTALLINE MODULE**

PRODUCT: TSM-DE09.05

PRODUCT RANGE: 380-395W

**395W+**

MAXIMUM POWER OUTPUT

**0~+5W**

POSITIVE POWER TOLERANCE

**20.5%**

MAXIMUM EFFICIENCY



**Outstanding visual appearance**

- Designed with aesthetics in mind
- Excellent cell color control by dedicated cell blackening treatment and machine selection.
- Thinner wires that appear all black at a distance



**High customer value**

- Lowest guaranteed first year and annual degradation;
- Designed for compatibility with existing mainstream system components
- Higher return on Investment



**High power up to 395W**

- Up to 20.5% module efficiency with high density interconnect technology
- Multi-busbar technology for better light trapping effect, lower series resistance and improved current collection




**High reliability**

- Minimized micro-cracks with innovative non-destructive cutting technology
- Ensured PID resistance through cell process and module material control
- Mechanical performance up to 5400 Pa positive load and 2400 Pa negative load




**High energy yield**

- The unique design provides optimized energy production under inter-row shading conditions
- Lower temperature coefficient (-0.34%) and operating temperature

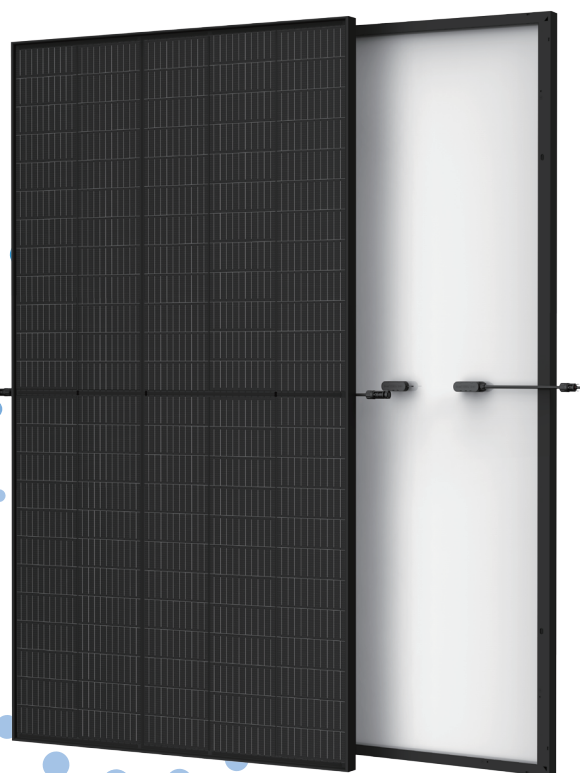

**Trina Solar's Backsheet Performance Warranty**

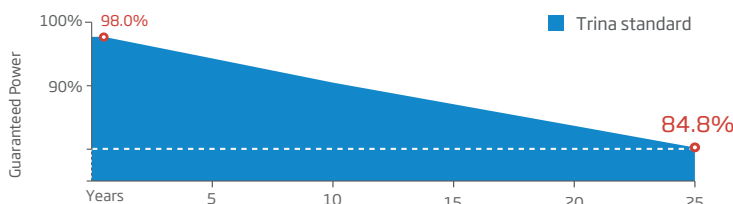

**Comprehensive Products and System Certificates**



IEC61215/IEC61730/IEC61701/IEC62716  
 ISO 9001: Quality Management System  
 ISO 14001: Environmental Management System  
 ISO14064: Greenhouse Gases Emissions Verification  
 ISO45001: Occupational Health and Safety Management System




[www.energreen.be](http://www.energreen.be)


Tel: 010 45 13 73  
 Fax: 010 45 90 73  
 info@energreen.be  
 Av. Franklin 5C  
 1300 Wavre




### DIMENSIONS OF PV MODULE(mm)

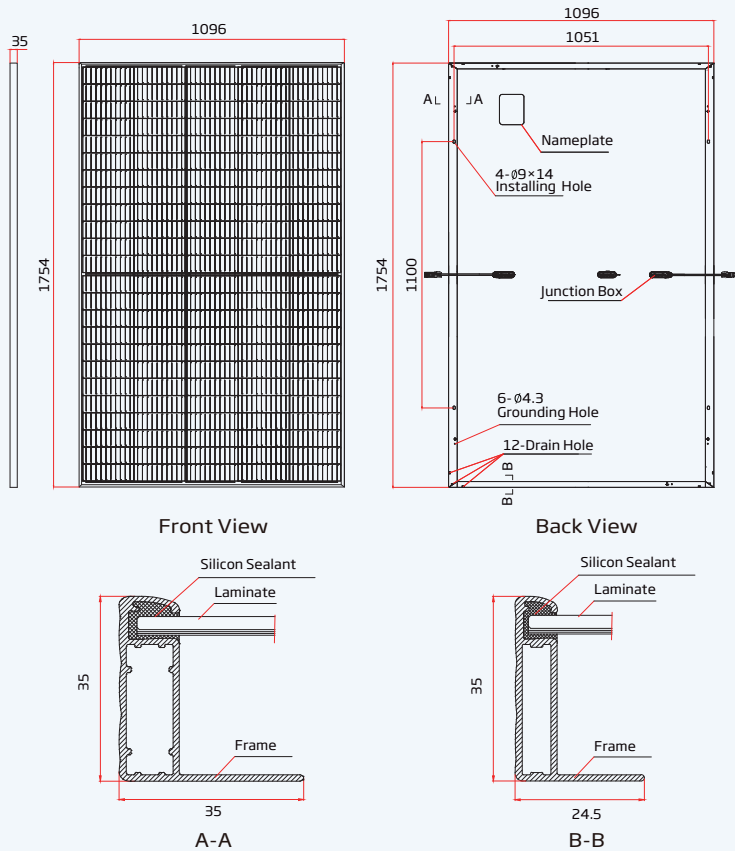

### I-V CURVES OF PV MODULE(390 W)

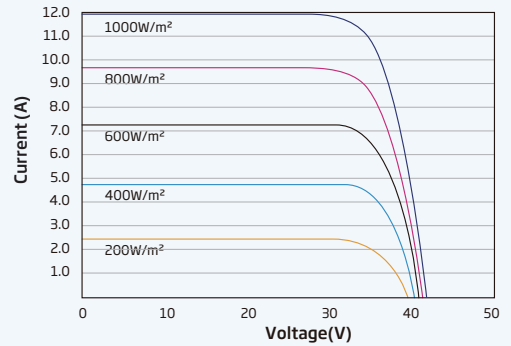

### P-V CURVES OF PV MODULE(390W)

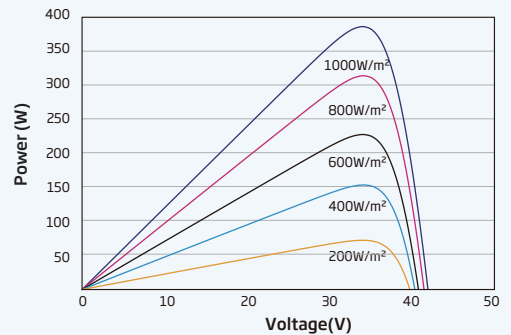

### ELECTRICAL DATA (STC)

Parameter	380	385	390	395
Peak Power Watts-P <sub>MAX</sub> (Wp)*	380	385	390	395
Power Tolerance-P <sub>MAX</sub> (W)	0 ~ +5			
Maximum Power Voltage-V <sub>MPP</sub> (V)	33.6	33.8	34.0	34.0
Maximum Power Current-I <sub>MPP</sub> (A)	11.31	11.39	11.47	11.62
Open Circuit Voltage-V <sub>OC</sub> (V)	40.6	40.8	41.0	41.2
Short Circuit Current-I <sub>SC</sub> (A)	11.83	11.90	11.97	12.03
Module Efficiency η <sub>m</sub> (%)	19.8	20.0	20.3	20.5

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5. \*Measuring tolerance: ±3%.

### ELECTRICAL DATA (NOCT)

Parameter	287	290	295	298
Maximum Power-P <sub>MAX</sub> (Wp)	287	290	295	298
Maximum Power Voltage-V <sub>MPP</sub> (V)	31.7	31.9	32.3	32.5
Maximum Power Current-I <sub>MPP</sub> (A)	9.04	9.10	9.13	9.18
Open Circuit Voltage-V <sub>OC</sub> (V)	38.2	38.4	38.6	38.7
Short Circuit Current-I <sub>SC</sub> (A)	9.53	9.59	9.65	9.69

NOCT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s.

### MECHANICAL DATA

Solar Cells	Monocrystalline
No. of cells	120 cells
Module Dimensions	1754×1096×35 mm (69.06×43.15×1.38 inches)
Weight	21.2 kg (46.7 lb)
Glass	3.2 mm (0.13 inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant material	EVA
Backsheet	Black-White
Frame	35mm(1.38 inches) Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm <sup>2</sup> (0.006 inches <sup>2</sup> ), Portrait: 280/280 mm(11.02/11.02 inches) Landscape: 1100/1100 mm(43.31/43.31 inches)
Connector	MC4 EVO2 / TS4*

\*Please refer to regional datasheet for specified connector.

### TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P <sub>MAX</sub>	-0.34%/°C
Temperature Coefficient of V <sub>OC</sub>	-0.25%/°C
Temperature Coefficient of I <sub>SC</sub>	0.04%/°C

### MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC)
Max Series Fuse Rating	20A

### WARRANTY

12 year Product Workmanship Warranty  
25 year Power Warranty  
2% first year degradation  
0.55% Annual Power Attenuation

(Please refer to product warranty for details)

### PACKAGING CONFIGURATION

Modules per box: 31 pieces  
Modules per 40' container: 806 pieces